

**MICROSEPARATOR® Coolant Cleaning System**

Automated coolant cleaning system for up to two generators, organic materials only. Integrates with Pump Stations and Chip Separator Assemblies - *not compatible with Chip Compactor Assemblies*. Designed for operation remote from generators allowing optimum use of surfacing laboratory space.


Available only in North America and Asia – See Microseparator® HC3

**Including:**

- Model CF65G Self-Cleaning Centrifuge with platform and sludge cart
- PLC system electrical control panel
- 304SS Coolant Tank
- Generator supply pump
- Centrifuge supply pump
- Refrigeration coil
- Tank floor agitation system
- Automatic level controls
- Automatic water makeup system,
- Automatic coolant metering system



**Dimensions**

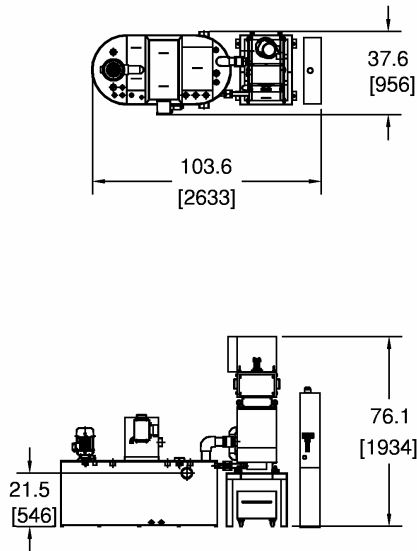

**Utility Requirements**

**Microseparator®**

**Power:**  
208V, 24A, 60 HZ, 3 phase  
400V, 14A, 50 HZ, 3 phase

**Compressed Air:**  
60 PSI @ 1 SCFM  
4.2 bar @ 28 l/m

**Domestic Water:**  
60 psi  
4.2 bar